



SINCERE
Right Solutions Together

Lighting

Catalogue



www.svisincere.in

Our Certificate



Siddhi Vinayak Industries is a leading manufacturer of high-quality lighting solutions We specialize in designing and producing advanced, energy-efficient lighting products for industrial, commercial, and residential applications, with a strong focus on the specific requirements of pharmaceutical and food processing industries that demand high standards of hygiene, safety, and performance since 2015 under the Brand Name SINCERE

Indoor & Outdoor Range



Clean Room Light
Sodium Vapour Light
Panel Light
High bay / UFO light
Well glass Light
Flood Light
Street Light
Linear Light
Oak Streetlight
24V AC Floodlight
PC Streetlight
Dolphin Streetlight
Lens Streetlight
Sensor UFO light
RGB Floodlight

*All pictures shown are for illustration purpose only, actual product may vary

*Customize specifications are acceptable, features/Specifications/Pictures are subject to change without any prior notice

*Not all products showcased in the catalogue may be available. Actual specifications may vary slightly from the description. Kindly contact Sales Team for stock information and delivery date.

Clean Room Light



Top Opening Panel


Product Code	Wattage	CCT	Front Frame Material	Size (MM)
SVCERTO300300	24W, 30W	6500K / 1700K	MS Powder Coated / SS 304	300 × 300
SVCERTO450450	42W, 60W	6500K / 1700K	MS Powder Coated / SS 304	450 × 450
SVICERTO500300	42W, 60W	6500K / 1700K	MS Powder Coated / SS 304	500 × 300
SVCERTO550550	42W, 60W, 80W	6500K / 1700K	MS Powder Coated / SS 304	550 × 550
SVCERTO600600	42W, 60W, 80W	6500K / 1700K	MS Powder Coated / SS 304	600 × 600



Bottom Opening Panel

Product Code	Wattage	CCT	Front Frame	Size (MM)
SVCRBO300300	24W, 30W	6500K/ 1700K	MS Powder Coated / SS 304	300 × 300
SVCRBO450450	42W, 60W	6500K/ 1700K	MS Powder Coated / SS 304	450 × 450
SVICRBO500300	42W, 60W	6500K/ 1700K	MS Powder Coated / SS 304	500 × 300
SVCRBO550550	42W, 60W, 80W	6500K/ 1700K	MS Powder Coated / SS 304	550 × 550
SVCRBO600600	42W, 60W, 80W, 120W	6500K/ 1700K	MS Powder Coated / SS 304	600 × 600

DUAL Lights available in all models
 Suitable for mounting in PUF Panel 30MM, 50MM & 80MM

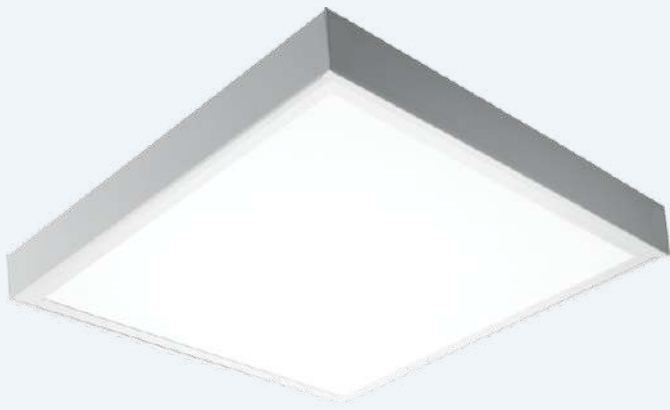

Surface Mounting Panel

Product Code	Wattage	CCT	Front Frame Material	Size (MM)
SVSM300300	30W	6500K/ 1700K	MS Powder Coated / SS 304	300 × 300
SVSM600600	42W, 60W, 80W	6500K/ 1700K	MS Powder Coated / SS 304	600 × 600

Sodium Vapour Light



Part No.	Lamp Type	Lamp Qty	Wattage (W)	Rated Voltage (V)
VL/MBI-50W	MH	1	50W	220 / 240
VL/MBI-70W	MH / SV	1	70W	220 / 240
VL/MBI-100W	MH	1	100W	220 / 240
VL/MBI-150W	MH / SV	1	150W	220 / 240

LED FLAME PROOF LIGHTS



FLP Cleanroom
Panel Light



FLP Flood Light



FLP High Bay
Light




FLP Street Light



FLP Switch & Socket

High Bay / UFO Light

G2



LED Type - 2835
Beam Angle - 70°
Optics Type - Spiral Lens

LHB-080-A	LHB-100-A	LHB-120-A	LHB-150-A	LHB-200-A	LHB-250-A
80W	100W	120W	150W	200W	250W
8800 lum	11000 lum	13200 lum	16500 lum	22000 lum	27500 lum

4KV Internal Surge Protection

G2




LED Type - 5050
Beam Angle - 90°
Optics Type - Bubble Lens

LHB-080-B	LHB-100-B	LHB-120-B	LHB-150-B	LHB-200-B
80W	100W	120W	150W	200W
9600 lum	12000 lum	14400 lum	18000 lum	24000 lum

4KV Internal + 10KV Surge Protection

G2




LED Type - 5050
Beam Angle - 70°
Optics Type - Spiral Lens

LHB-080-C	LHB-100-C	LHB-120-C	LHB-150-C	LHB-200-C	LHB-240-C
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum

4KV Internal + 10KV Surge Protection

G2



LED Type - 5050
Beam Angle - 90°
Optics Type - Bubble Lens

LHB-080-D	LHB-100-D	LHB-120-D	LHB-150-D	LHB-200-D
80W	100W	120W	150W	200W
9600 lum	12000 lum	14400 lum	18000 lum	24000 lum

4KV Internal + 10KV Surge Protection

G1



Beam Angle - 70°
LED Type - 5050
Optics Type - Spiral

LHB-080-E	LHB-100-E	LHB-120-E	LHB-150-E	LHB-200-E	LHB-240-E
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum

4KV Internal + 10KV Surge Protection

G1



Beam Angle - 120°
Lens Type - Glass

LHB-080-F	LHB-100-F	LHB-120-F	LHB-150-F	LHB-200-F
80W	100W	120W	150W	200W
9200 lum	11500 lum	13800 lum	17250 lum	23000 lum

4KV Internal + 10KV Surge Protection

Accessories



I-Bolt



Safety Rope

.....

.....

.....

.....

.....

For Customization needs !!



Visit
www.svisincere.in

Well Glass Light

G2



Beam Angle - 120°
Optics Type - Clear Dome

30W LWG-030-A
40W LWG-040-A
45W LWG-045-A

G2



Beam Angle - 120°
Optics Type - Milky Dome

30W LWG-030-B
40W LWG-040-B
45W LWG-045-B

G1



Beam Angle - 120°
Optics Type - Clear Dome

60W LWG-060-C
70W LWG-070-C
80W LWG-080-C

G1



Beam Angle - 120°
Optics Type - Milky Dome

60W LWG-060-D
70W LWG-070-D
80W LWG-080-D

G1



Beam Angle - 120°
Optics Type - Glass

60W LWG-060-E
70W LWG-070-E
80W LWG-080-E

Canopy Light



Lens Type - Glass

80W LCL-080

Accessories



I-Bolt



SPD Cable

.....

.....

.....

.....

.....

For Customization needs !!



Visit
www.svisincere.in

Flood Light

DOB Floodlights



Beam Angle - 36° / 46°

LFL-050-A	LFL-100-A	LFL-150-A	LFL-200-A
50W	100W	150W	200W
5000 lum	10000 lum	15000 lum	20000 lum
4KV Internal Surge Protection			


Optima Floodlight



Beam Angle - 120°

LFL-030-B	LFL-050-B	LFL-100-B	LFL-150-B	LFL-200-B	LFL-250-B
30W	50W	100W	150W	200W	250W
3200 lum	5200 lum	10500 lum	15750 lum	21000 lum	26250 lum
4KV Internal Surge Protection					

Optima Floodlight Lens



Beam Angle - 90°

LFL-100-C	LFL-150-C	LFL-200-C	LFL-250-C
100W	150W	200W	250W
10500 lum	15750 lum	21000 lum	26250 lum
4KV Internal Surge Protection			

Optima Floodlight Lens



Beam Angle - 90°

LFL-050-D	LFL-100-D	LFL-150-D	LFL-200-D	LFL-250-D
50W	100W	150W	200W	250W
6000 lum	12000 lum	18000 lum	24000 lum	30000 lum
4KV Internal Surge Protection + 10KV				

24V AC optima floodlight



Input Current - 2.08A / 4.16A
Input Voltage - 22-26VAC

50W LFL-050-E
100W LFL-100-E



Linear Light

100W



LLL-100

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

200W



LLL-200

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

300W



LLL-300

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

400W



LLL-400

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

Accessories



SPD Cable

For Customization needs !!



Visit
www.svisincere.in

Street Light

Frame Streetlight



Beam Angle - 120°
4KV Internal Surge Protection

LSL-040-A	LSL-060-A	LSL-100-A	LSL-120-A	LSL-150-A	LSL-200-A	LSL-250-A
40W	60W	100W	120W	150W	200W	250W
43mm	46mm	54mm	60mm	60mm	64mm	64mm
4400 lum	6600 lum	11000 lum	13200 lum	16500 lum	22000 lum	27500 lum

Frame Streetlight



Type - II Lens
6KV Internal Surge Protection

LSL-040-B	LSL-060-B	LSL-100-B	LSL-120-B	LSL-150-B	LSL-200-B	LSL-250-B
40W	60W	100W	120W	150W	200W	250W
43mm	46mm	54mm	60mm	60mm	64mm	64mm
4200 lum	6300 lum	10500 lum	12600 lum	15750 lum	21000 lum	26250 lum

Oak Streetlight



6KV Internal Surge Protection
Beam Angle - 120°

OSL-045-C	OSL-060-C	OSL-075-C	OSL-150-C
45W	60W	75W	150W
37mm	54mm	54mm	60mm
5600 Lum	7500 lum	9200 lum	18000 lum

Oak Lens Streetlight



6KV Internal Surge Protection
Beam Angle - 45° Type - II lens

OSL-045-D	OSL-060-D	OSL-075-D	OSL-150-D
45W	60W	75W	150W
37mm	54mm	54mm	60mm
5200 Lum	7000 lum	8400 lum	17300 lum

Optima



4KV Internal Surge Protection

OLSL-020-E	OLSL-040-E	OLSL-060-E
20W	40W	60W
40mm	43mm	46mm
2100 lum	4300 lum	6500 lum

Dolphin G2



LDL-045-F	LDL-045-G	LDL-060-F	LDL-060-G
45W	45W	60W	60W
5000 Lum	5000 Lum	6600 Lum	6600 Lum
-	LDR Sensor	-	LDR Sensor
4KV Internal Surge Protection			

Dolphin G1



Beam Angle - 45° - 120° Type - II lens

LDL-025-H	LDL-045-H	LDL-080-H
25W	45W	80W
3000 lum	5200 lum	9300 lum
4KV Internal Surge Protection		

Accessories



SPD Cable

For Customization needs !!



Visit
www.svisincere.in

Street Light

ECO Streetlight



Asymmetric Lens
4KV Internal Surge Protection

ESL-024-I	ESL-036-I	ESL-050-I	ESL-060-I	ESL-090-I	ESL-120-I
24W	36W	50W	60W	90W	120W
2400 lum	3600 lum	5000 lum	6000 lum	9000 lum	12000 lum

Super Eco streetlight



Asymmetric Lens
4KV Internal Surge Protection

SESL-024-J	SESL-036-J	SESL-050-J	SESL-100-J
24W	36W	50W	100W
2400 lum	3600 lum	5000 lum	10000 lum

PC Streetlight



PC Cover
40mm Pole Dia
16W SLP-016-K



Special Projects

DAY LIGHT SENSOR

Streetlight equipped with day light sensor



Day light sensor



Energy Saving



Plug and play
no extra installation
required



4-10Kv Surge
In different models



5 lux -
25 lux



IP 66
Rated



In - Build
Sensor



Robust
Driver

Accessories



SPD Cable

For Customization needs !!



Visit
www.svisincere.in

SENSOR HIGHBAY

A Microwave Motions sensor highbay with day light function



Auto On Off
Dimmable



4-13m
Detection Range



3 Sec to
30 mins



5 lux -
300Lux



IP 65
Rated





0 Sec -
Infinity



Remote
controller

LHB-080-G	LHB-100-G	LHB-120-G	LHB-150-G	LHB-200-G	LHB-240-G
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum
4KV Internal + 10KV Surge Protection					

LED Type - 5050
Beam Angle - 70°
Optics Type - Spiral

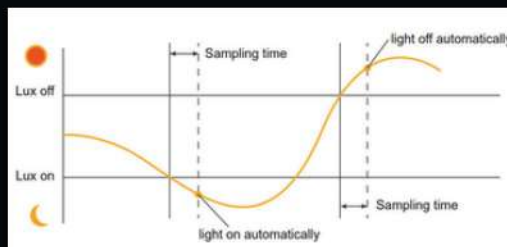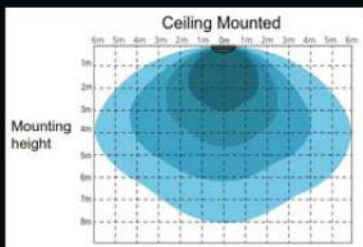

Accessories



I-Bolt



Safety Rope

For Customization needs !!



Visit
www.svisincere.in

Architectural Range



Panel light
COB light
Downlight
Surface light
Pop out light
Pullout light
Wall lights
Laser light
Wall washer
Al Profile
Multi light
Track light
Strip light
Magnetic light



Darrow COB



Wattages - 7W / 12W / 24W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 95mm
Height - 78mm / 96mm / 121mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Gun Black / Chrome

Darrow Lite COB



Detachable*

Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 85mm
Height - 70mm / 85mm / 108mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Gun Black / Chrome

Darrow Slim COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 85mm
Height - 59mm / 85mm / 105mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Gun Black / Chrome

Surface Pro COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - N.A
Height - 72mm / 82mm / 95mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Gun Black / Chrome

Surface R COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - N.A
Height - 70mm / 85mm / 100mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Shiny Black / Chrome / Rose gold

Spark COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 65mm / 80mm / 90mm
Height - 65mm / 70mm / 100mm
Body Color - Copper / Shiny black
OD - 70mm / 85mm / 95mm

Delta COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 85mm
Height - 65mm / 75mm / 100mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Shiny Black / Chrome / Rose Gold

Blaze Lens COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 85mm
Height - 65mm / 70mm / 100mm
Body Color - White / Black

Blaze Tilt COB



Wattages - 3W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°/45°
Cutout - 55mm / 80mm / 100mm
Height - 35mm / 40mm / 50mm
Body Color - White / Black

Curvy COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 45°
Cutout - 60mm / 75mm / 90mm
Height - 60mm / 60mm / 65mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Shiny Black / Chrome / Rose Gold

Darrow Trimless COB



Detachable*

Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 95mm
Height - 78mm / 96mm / 121mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Gun Black / Chrome

Darrow SQ COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 95mm
Height - 78mm / 96mm / 121mm
Body Color - White / Black
Finish -White / Matt Black / Gold
Gun Black / Chrome

Flare COB



Smart control

Wattages - 12W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 75mm
Height - 75mm
Body Color - White / Black
Finish - White / Matt Black / Gold
Gun Black

Slit COB



Wattages - 8W / 12W
Color Temp - WW / NW / CW
Beam Angle - 30°
Cutout - 65mm / 75mm
Height - 55mm / 60mm
Body Color - White / Black
OD - 100mm / 130mm / 150mm

Orca COB



Smart control

Wattages - 7W / 12W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55X55mm / 75X75mm
Height - 52mm / 52mm
Body Color - White / Black

Laser Focal C Light



Wattages - 3W / 6W / 12W / 20W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 35X35mm / 58X35mm
85X35mm / 137X35mm / 237X35mm
Body Color - White / Black
Finish - White / Black / Rose gold

Flare Multi COB



Wattages - 24W / 36W / 48W
dimensions - 165X87mm
245X87mm
165X165mm

Laser Deep Light



Wattages - 6W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 45°
Cutout - 65X25mm / 125X25mm
95mmX95mm
Body Color - White / Black

Laser Tilt Light



Wattages - 6W / 12W / 24W
Color Temp - WW / NW / CW
Beam Angle - 45°
Cutout - 78X43mm / 136X43mm
147X49mm
Body Color - White / Black

Laser Focal Light



Wattages - 12W / 20W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 128X55mm / 205X50mm
Body Color - White / Black



Multi Downlight



Wattages - 12W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 75mm
Body Color - White
Special - 12W COB +12W Downlight
Alternate when switching
on and off

Ellipse COB



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 36°
Cutout - 55mm / 75mm / 85mm
Height - 43mm / 44mm / 51mm
Body Color - White / Black / Gold

Splash COB IP65



Wattages - 12W / 18W / 24W
Color Temp - WW / NW / CW
Protections - IP65
Cutout - 75mmX95mmX115mm
Height - 54mmX75mmX75mm
Body Color - White / Black
OD- 85mmX105mmX130mm

Canary Shine



Wattages - 12W / 18W / 24W
Color Temp - WW / NW / CW
Beam Angle - 120°
Cutout - 90mm / 120mm / 140mm
Body Color - White / Black
OD - 100mm / 130mm / 150mm
Finish-White / Shiny Black / Rose gold

Pith AL Light



Wattages - 12W / 18W / 24W
Color Temp - WW / NW / CW
Beam Angle - 120°
Diameter - 80mm / 90mm / 128mm
Height - 46mm / 48mm / 50mm
Body Color - White / Black
Material - ADC12

Pith AL Tall Light



Wattages - 15W / 20W
Color Temp - WW / NW / CW
Beam Angle - 120°
Diameter - 55mm / 85mm
Height - 70mm / 72mm
Body Color - White / Black
Material - ADC12

Track Lens COB



Wattages - 20W / 30W
Color Temp - WW / NW / CW
Beam Angle - 24°
Length - 145mm / 150mm
Body Color - White / Black

Focus Wall Light



Wattages - 20W / 30W
Color Temp - WW / NW / CW
Beam Angle - 24°
Dimension- 135mm / 160mm
Length - 85mm
Body Color - White / Black

Surface Panel



Wattages - 6W / 12W / 18W / 22W
Color Temp - WW / NW / CW
Beam Angle - 120°
Dimensions - 120mm / 170mm
225mm / 30m
Body Color - White

Slim Panel Light



Wattages - 6W / 12W / 18W / 22W
Color Temp - WW / NW / CW
Beam Angle - 120°
Cutout - 100mm / 150mm / 200mm
OD - 120mm / 165mm / 225mm
Height - 14mm
Material - ADC12

2X2 Panel Light



Wattages - 36W
Color Temp - WW / NW / CW
Beam Angle - 120°
Dimension- 595mmX595mm
Height - 32mm
Body Color - White
Material - MS

1x1 Panel Light



Wattages - 24W
Color Temp - WW / NW / CW
Beam Angle - 120°
Dimension- 300x300mm
Height - 13mm
Body Color - White



Up Down Light 1



Wattages - 14W / 24W
Color Temp - WW / NW / CW
Dimension- 52X160X82mm
Body Color - Black / White / Grey
Material - ADC12

Up Down Light 2



Wattages - 2W / 4W
Color Temp - WW
Protections - IP54
Dimensions - 75mmX75mmX50mm
Body Color - Black

Moss Footlight 1



Wattages - 3W / 6W
Color Temp - WW
Protections - IP54
Dimensions - 85mmX85mmX65mm
145mmX85mmX65mm
Body Color - Black

Moss Footlight 2



Wattages - 8W
Color Temp - WW
Dimensions - 130mm Dia
68mm depth
Body Color - White / Black / Grey
Material - ADC12

Moss Footlight 3



Wattages - 3W
Color Temp - WW
Protections - IP54
Dimensions - 85mmX85mmX65mm
145mmX85mmX65mm
Body Color - Black / White

Up Down Light Multi



Type - 2+2 2 way / 3+3 2 Way
Color Temp - WW
Protections - IP54
Dimensions - 140mmX85mmX40mm
180mmX85mmX40mm
Body Color - Black

Up down Light 3



Wattages - 3W / 6W
Color Temp - WW
Protections - IP54
Dimensions - 80mmX80mmX65mm
145mmX80mmX65mm
Body Color - White / Black

Up down Light 4



Wattages - 10W
Color Temp - WW / NW / CW
Beam Angle - 120°
Dimension- 120X92X28mm
Body Color - Black / White / Grey
Material - ADC12

LED Batten PC



Wattages - 7W / 12W / 18W
Color Temp - WW / NW / CW
Beam Angle - 120°
Height - 75mm / 95mm / 125mm
Body Color - White / Black
Operation mode - 80% dimming
Range of Detention - 8 meter

Bulk Head PC



Wattages - 12W
Color Temp - WW / NW / CW
Beam Angle - 120°
Dimensions - 183mmX122mmX85mm
183mmX90mm
Body Color - White

Wall Washer



Wattages - 18W / 36W / 48W / 72W
Length - 0.5M / 1M / 1.2M / 1M
Protections - IP65
Beam Angle - 15° / 30°
Dimensions - 50mmX60mm
Body Color - Silver

Spike COB



Wattages - 4W / 7W / 12W
Color Temp - WW
Beam Angle - 54°
Protections - IP65
Body Color - Black





Authorised Channel Partner



Phone:
+91 9320009461
+91 9870982489

Email:
avg.param@gmail.com

Website:
www.svisincere.in

Address:
Siddhi Vinayak Industries
Plot No. 28-B, Sector 3, IIE
SIDCUL Haridwar – 249403 Uttarakhand, India